


PATENTED
HB400



NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

THE NEW MULTISCREENING BUCKET FOR FRONTAL COUPLING, WITH TWO ROTARY DOUBLE DRUMS COUPLED IN A SINGLE FRAME, IS SUITABLE FOR SELECTION DUTIES ON TURNED SOILS AND RESULTING MATERIALS. THE MATERIAL SIZE CHANGE, FROM A MINIMUM OF 25 MM TO A MAXIMUM OF 65 MM (1 - 2,4 IN), IS HYDRAULICALLY CONTROLLED FROM THE CAB WITHOUT REPLACING ANY MECHANICAL PART AND CONSIDERABLY REDUCING THE WORKING TIMES.

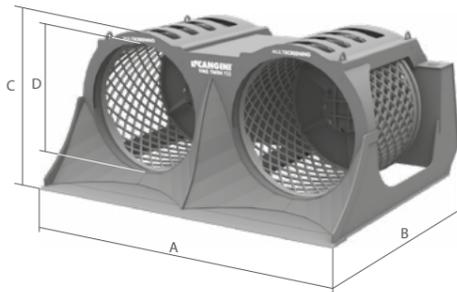

	MOD.	VMS TWIN F20	
A	MM (IN)	2200	(87)
B	MM (IN)	1755	(70)
C	MM (IN)	1000	(39)
D	MM (IN)	870	(34)
	W/O COUPLER	KG (LB)	1280 (2822)
	OPERATING	KG (LB)	2540 (5600)
	MIN.	MM (IN)	25 (1)
	MAX.	MM (IN)	60 (2,4)
		L/MIN (GAL/MIN)	60 (16)
	MAX.	L/MIN (GAL/MIN)	150 (39)
	MAX.	BAR (PSI)	350 (5076)
		L (GAL)	420 X 2 (111 X 2)
	14/8 PIN CONNECT*		STD 14 PIN

* THE CONNECTOR TYPE YOU REQUIRE MUST BE INDICATED AT THE TIME OF ORDERING, OTHERWISE THE 14-PIN HD36-18-14SE CONNECTOR WILL BE SUPPLIED AS STANDARD.



DOUBLE PERFORMANCE- EXCELLENT VISIBILITY



STANDARD TECHNICAL FEATURES

- 1 B400 DRUMS**
THE DRUMS CAN AFFORD HIGH WORK PACES THANKS TO THEIR HIGHLY RESISTANT MATERIAL THAT EXTENDS THEIR USEFUL LIFE.
- 2 AUTOMATIC SCREENING SYSTEM**
THE NEW ROTARY DOUBLE DRUM CONCEPT WITH HYDRAULIC CONTROL FROM THE CAB ALLOWS TO SELECT THE MATERIAL SIZE, FROM 25 TO 65 MM (1 - 2,4 IN), WITHOUT STOPPING THE WORK CYCLE.
- 3 2 HOSES KIT**
IT ALLOWS THE FUNCTIONING OF THE ROTATION AND HYDRAULIC SHIFTING OF THE SCREENING DRUMS ALSO ON MACHINES PROVIDED WITH A DOUBLE EFFECT LINE. CONTROL KIT WITH MAGNETS TO EASILY PUT IT INSIDE THE CAB.
- 4 OPERATING LOAD**
- 5 DOUBLE PERFORMANCE- EXCELLENT VISIBILITY (PATENTED)**
THE TWO SCREENING DRUMS REDUCE THE VERTICAL FOOTPRINT, GRANTING AN EXCELLENT VISIBILITY AND THEREFORE A GREATER PRODUCTIVITY.
- 6 14 PIN HD36-18-14SE (A) 8 PIN HD36-18-8SE (B) CONNECT**
THE CONNECTOR TYPE YOU REQUIRE MUST BE INDICATED AT THE TIME OF ORDERING. OTHERWISE THE 14-PIN CONNECTOR WILL BE SUPPLIED AS STANDARD.

NB: THE EQUIPMENT IS SUPPLIED COMPLETE WITH PIPES AND CONNECTIONS

OPTIONAL

- 7 HITCH FOR ARTICULATED LOADERS, BACKHOE LOADERS AND TELEHANDLER HANDLERS.**
IT'S POSSIBLE TO ADD THE HITCH FOR ARTICULATED LOADERS, BACKHOE LOADERS AND TELEHANDLER HANDLERS TO THE SKID LOADER HITCH PROVIDED WITH THE STANDARD EQUIPMENT.
- 8 ELECTRIC KIT**