





NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

THE LOG GRAPPLE CAN BE EQUIPPED WITH 360° HYDRAULIC ROTATION, PARTS SUBJECT TO GREATER WEAR ARE MADE OF DOMEX 700. STANDARD EQUIPMENT INCLUDES A BLOCK VALVE ON THE CLOSING CYLINDER.

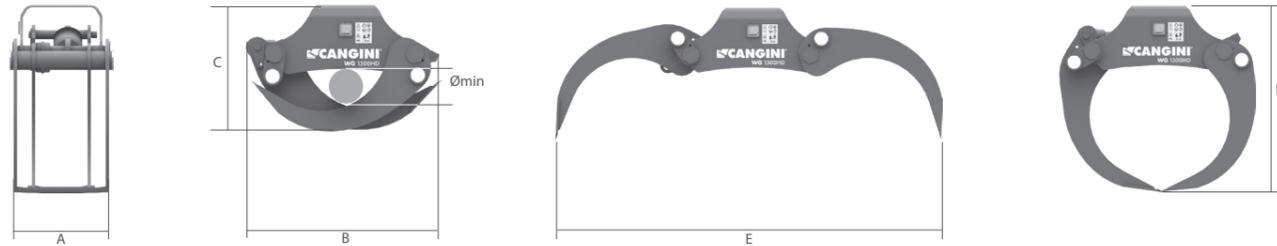

	MOD.	WGF 100	WGF 110	WGF 130
A	MM (IN)	330 (13)	395 (16)	425 (17)
B	MM (IN)	610 (24)	655 (26)	735 (29)
C	MM (IN)	410 (16)	440 (17)	495 (19)
D	MM (IN)	650 (25)	695 (27)	790 (31)
E	MM (IN)	1090 (43)	1180 (46)	1400 (55)
W/O COUPLER	KG (LB)	166 (366)	210 (462)	240 (529)
MIN.	MM (IN)	70 (2)	80 (3,1)	75 (2,9)
MAX.	L/MIN (GAL/MIN)	50 (13)	50 (13)	50 (13)
MAX.	KG (LB)	500 (1102)	1000 (2204)	1000 (2204)
MAX.	BAR (PSI)	200 (2901)	200 (2901)	200 (2901)
ELECTRIC KIT		STD	STD	STD

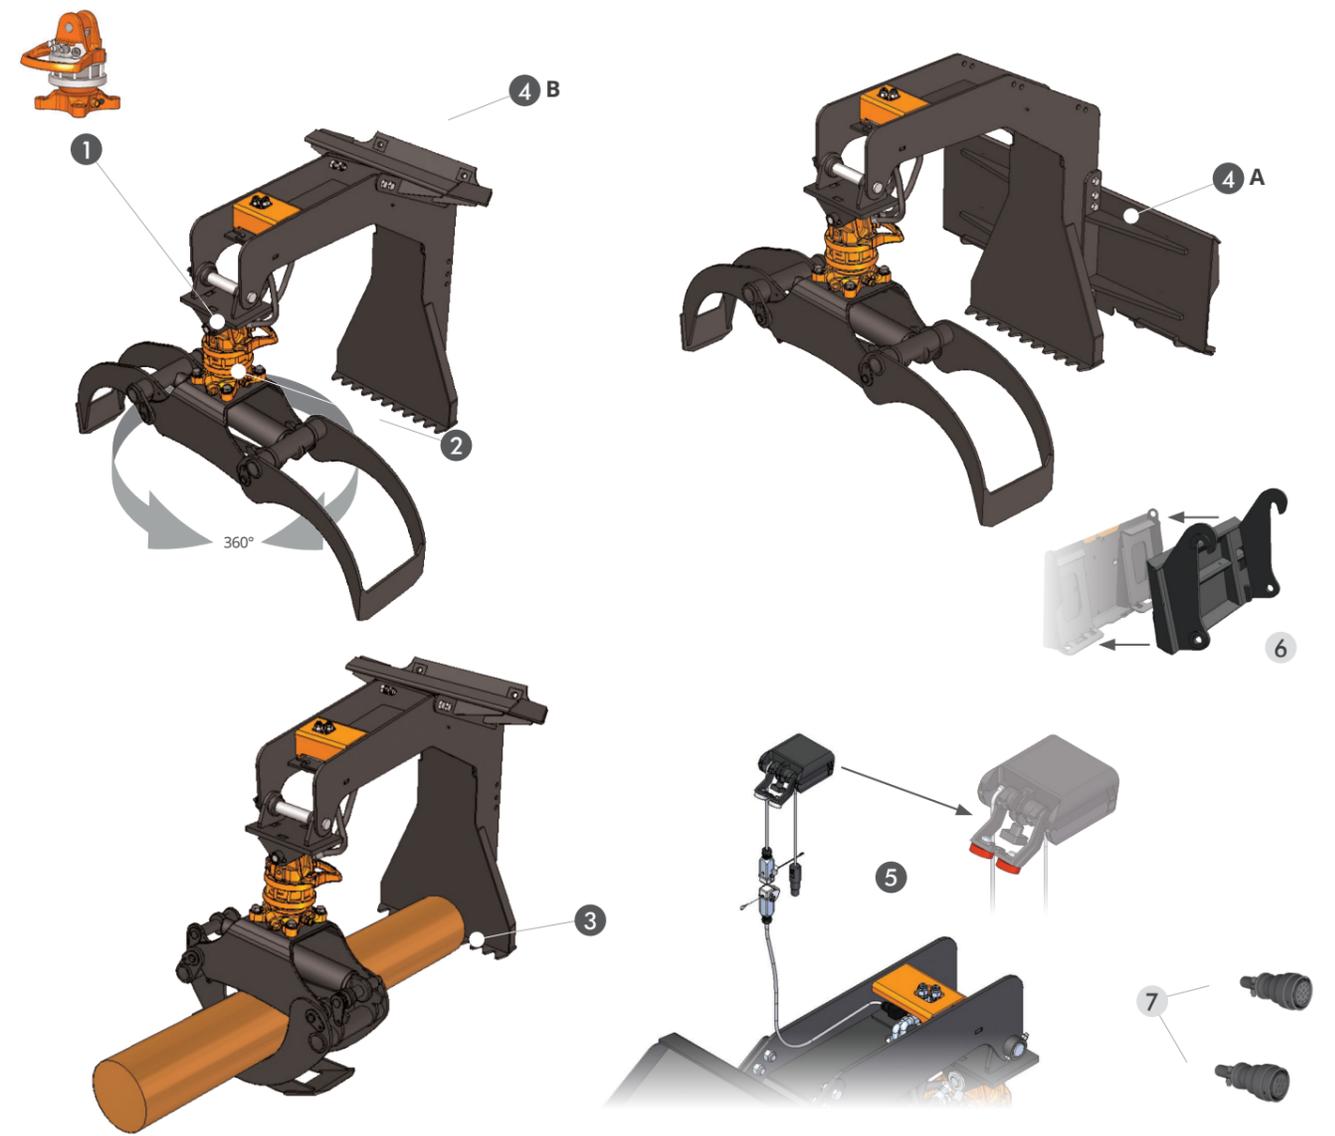

STANDARD

1 FRONT WOOD GRABS WITH HYDRAULIC 360° ROTATION

2 BLOCK VALVE ON THE CYLINDER

3 SERRATED BLADE AS SUPPORT TO MATERIAL HANDLING
IT OFFERS A SUPPORT BASE DURING THE HANDLING OF THE LIFTED MATERIAL

4A SKID LOADER HITCH

4B MINI SKID LOADER HITCH

5 2 HOSES KIT

IT ALLOWS THE FUNCTIONING OF THE ROTATION AND OPENING/CLOSING OF THE CLAWS ON MACHINES PROVIDED WITH ONE DOUBLE EFFECT LINE. IT CONTROL KIT WITH MAGNETS TO EASILY PUT IT INSIDE THE CAB. **CONTROL BOX INCLUDED WITH 2 PIPE KIT**

NB : THE EQUIPMENT IS SUPPLIED COMPLETE WITH PIPES AND CONNECTIONS

OPTIONAL

6 ARTICULATED LOADERS, BACKHOE LOADERS HITCH

7 14 PIN (A) 8 PIN (B) CONNECT

THE CONNECTOR TYPE YOU REQUIRE MUST BE INDICATED AT THE TIME OF ORDERING, OTHERWISE THE 14-PIN CONNECTOR WILL BE SUPPLIED AS STANDARD.